


ELEMENT 4

OUTDOOR FIRES



APPENDIX

Element4 Outdoor series

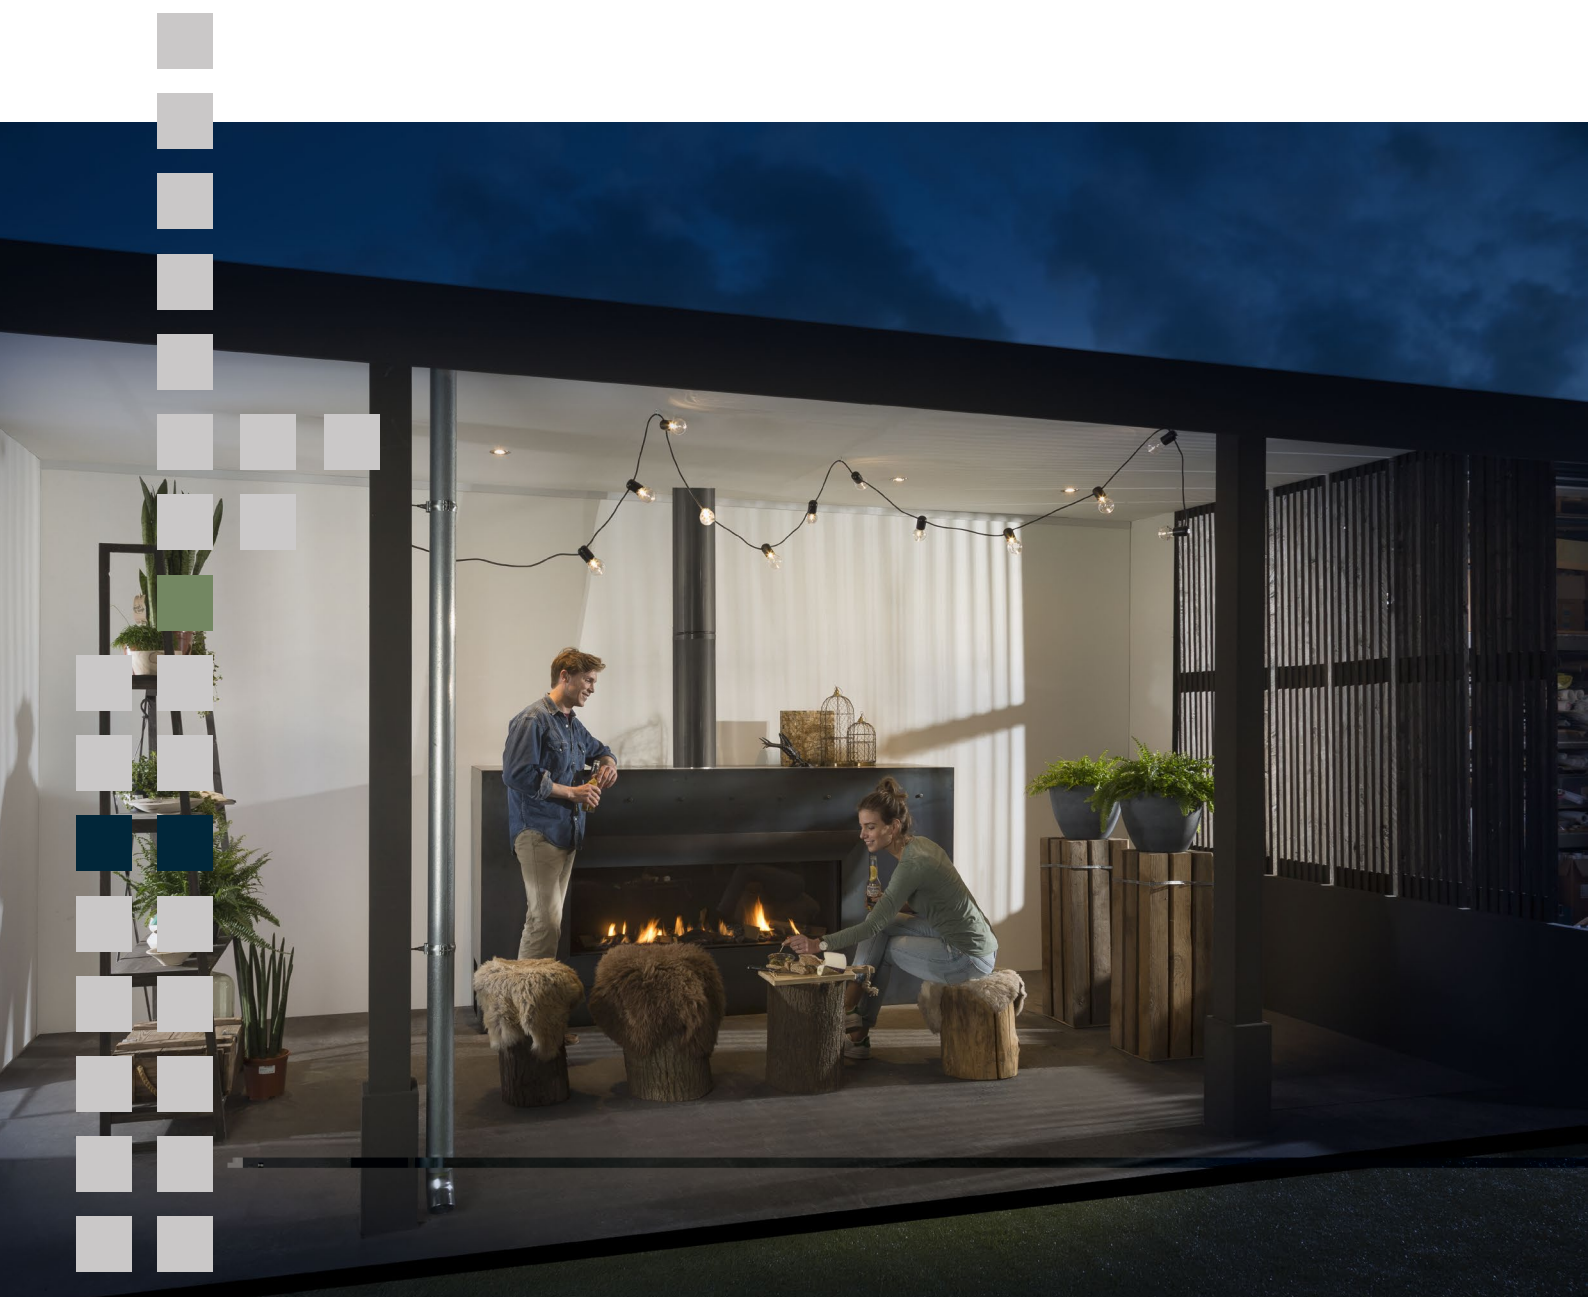

LEAVE THESE INSTRUCTION WITH THE DEVICE

1 CE declaration

We hereby declare that the design and construction of the Element4 gasfires are complying to the essential demands and regulations for gas products.

Product:

- Outdoor Balanced flue gas fire

Model:

- Club 140
- Modore 75H
- Modore 140
- Sky
- Sky-T

Applicable EG-guidelines and specifications:

- (EU) 2016/426 (GAR)

Applicable norms:

- NEN-EN-613
- NEN-EN-613/A1

This declaration loses its validity when changes to the device are made without the written permission by Element4. You can ask for a copy of the test certificates of all models via our general e-mail adress, which is found on the back of this manual.



J. Kempers
CEO

2 Installation

Installation of the fireplace

Every Element4 outdoor fire is to be installed in the exact same manner as an indoor fires. All installation steps are to be executed as described in the regular manual. This also implies that the flue of the outdoor fires need to be concentric. These steps are to guaranty that the fires will function properly.

Roof

An Element4 Outdoor fire is not suited to be installed unprotected from all weatherconditions. Therefore every outdoor installation is to be placed under a roof.

The following rules apply to the roof:

- The roof needs to give a minimum of 1,5 meters overhang from every window. (See figure 1)
- The roof needs to give a minimum of 0,5 meter overhang from the sides of the fireplace

Fire Safety

Every overhang is to be installed according the fire safety regulations that apply in you local area. These regulations can be found in chapter 6 of the regular installation manual for each Element4 gas fire.

3 Special outdoor parts

Waterproof mounting box

To protect the gas block and all electric components each outdoor fire includes a special high quality IP-66 mounting box (see figure 2). The mounting box is waterproof and dust free. Also it protects agains weather conditions and little vermin.

Durin installation the contents of the mounting box need to be accessible for the service mechanic at all time.

Note: The regular Element4 service hatch that can be used for indoor fires is not applicable in combination with the mounting box. Consequently, an alternative solution has to be installed to be able to access the electronics at all times.

Stainless steel trims

To stop the fireplace from corroding the trims of each outdoor fire are made of stainless steel (see image 3).



Figure 1 - Minimal dimensions for overhang with outdoor fires



Figure 2 - Mounting box



Figure 3 - Example Stainless steel trim

A decorative graphic on the left side of the page consisting of a grid of squares. The grid is 10 squares wide and 18 squares high. Most squares are light gray. There is a single dark green square at row 7, column 1. There are two dark blue squares at row 12, column 1 and row 12, column 2. There are also a few other squares in the upper right portion of the grid that are light gray.

ELEMENT 4 B.V.

Paxtonstraat 23
8013 RP Zwolle
The Netherlands
Info@element4.nl
www.element4-fires.com

JUNE 2018

